

Interior and Exterior Application

Asbrabronz Solid Brass Safety Stair Tread Nosings are filled with slip-resistant Suregrip or Supagrit silicon carbide mineral granules for heavy and light duty applications and are available with a wide range of insert colours (see page 07 to 08).

Lengths

All Asbrabronz profiles are offered factory cut to the site required length (up to 4600mm in 1 continuous length) complete with countersunk holes, brass screws and plastic plugs. If specified at time of order treads can be supplied in full manufacturing lengths of 4600mm for on site cutting and drilling to suit clients supplied fixings.


Factory Cutting Tolerance: +0/-3mm.

Screw Fixing Holes

Unless otherwise specified at time of order, holes will be provided in the treads to suit 8 gauge stainless steel or brass screws at Latham's standard 250mm centres. Any special machining, mitering, modifications or alternative hole locations will be carried out at extra cost.


Finishes

Asbrabronz Brass profiles are supplied in brush finish. On request profiles can be supplied with a polished bullnose.

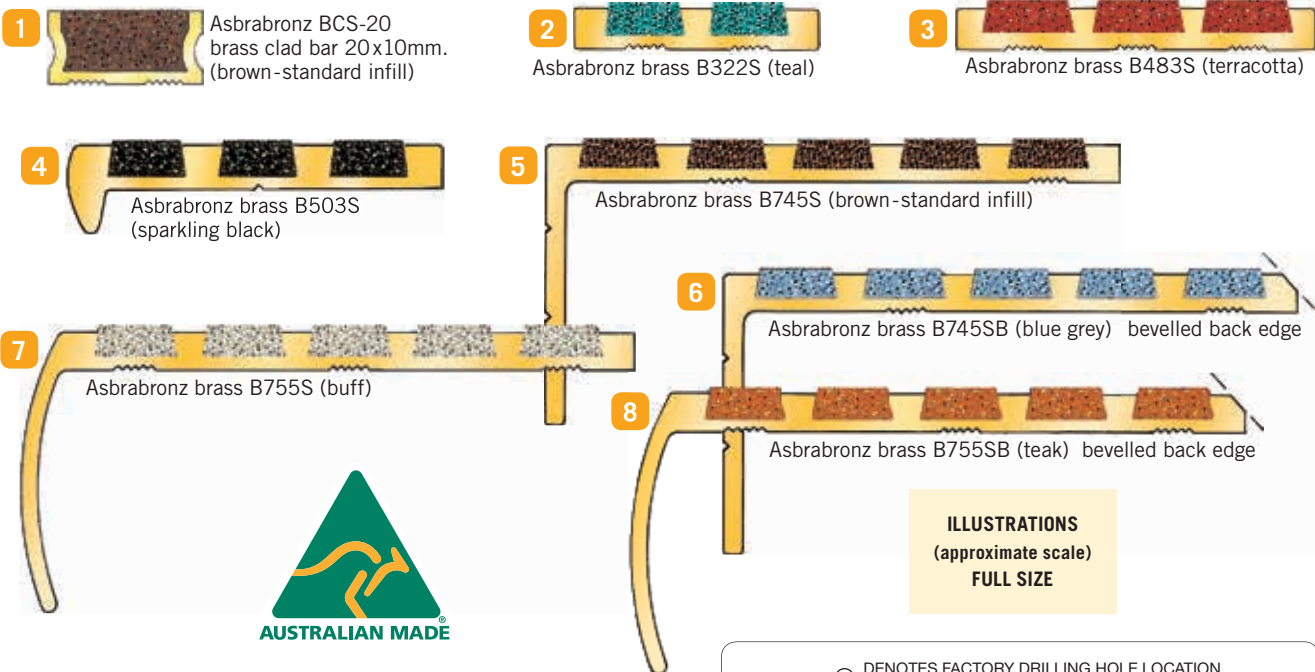

Index	Product No.	Metal Type	A	B	C	D	E	F	Drilling Location
1	BCS-20	Brass	20	20	10	-	-	-	1
2	B322S	Brass	33	-	5	33	-	-	1+2
3	B483S	Brass	48	-	5	48	-	-	2
4	B503S	Brass	43	12.5	6	47	-	-	3
5	B745S	Brass	73	37	5	75	-	-	4
6	B745SB	Brass	73	37	5	75	-	3	4
7	B755S	Brass	75	37	5	80	-	-	4
8	B755SB	Brass	75	37	5	80	-	3	4





Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

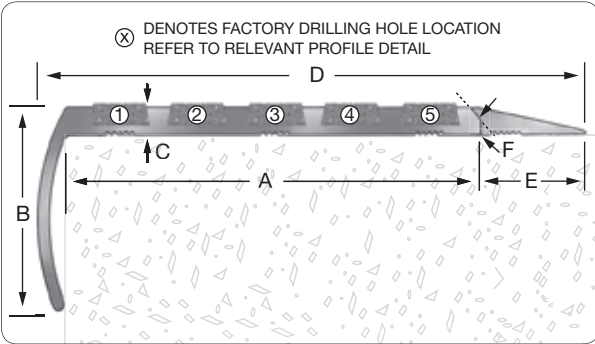




ILLUSTRATIONS
(approximate scale)
FULL SIZE

Asbrabronz brass B1005ST (teal)

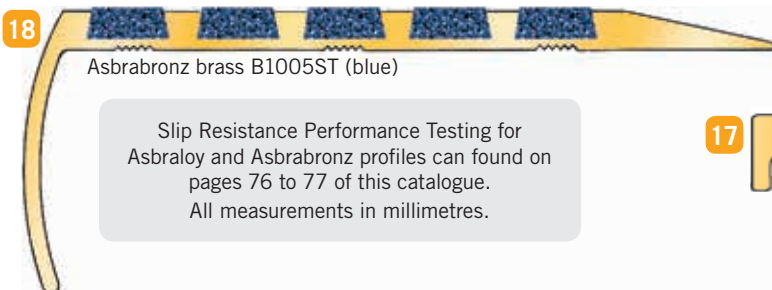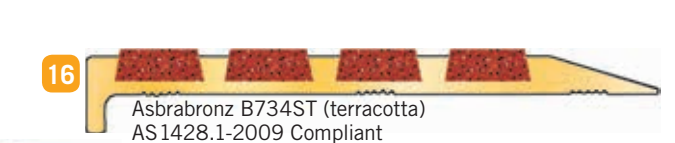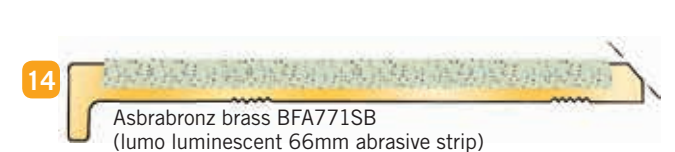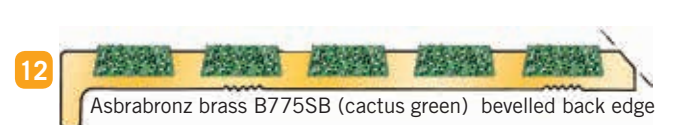

Slip Resistance Performance Testing for
Asbraloy and Asbrabronz profiles can be found on
pages 76 to 77 of this catalogue.
All measurements in millimetres.

Index	Product No.	Metal Type	A	B	C	D	E	F	Drilling Location
9	B765S	Brass	69	12	5	75	-	-	4
10	B765SB	Brass	69	12	5	75	-	3	4
11	B775S	Brass	73	10	5	75	-	-	4
12	B775SB	Brass	73	10	5	75	-	3	4
13	BFA771S	Brass	73	10	5	75	-	-	4
14	BFA771SB	Brass	73	10	5	75	-	3	4
15	B805S	Brass	75	-	5	-	-	-	3
16	B734ST	Brass	58	10	5	75	15	-	4
17	BFA731ST	Brass	58	10	5	75	15	-	1
18	B1005ST	Brass	75	37	5	98	18	-	4

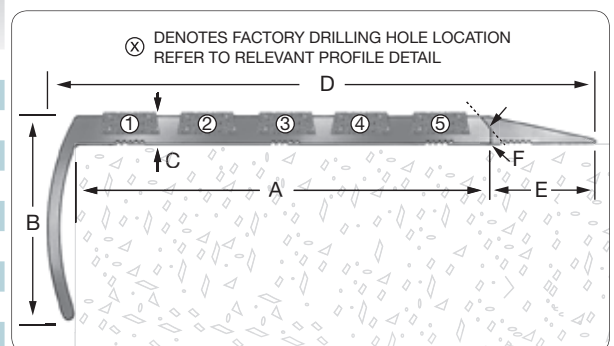

Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

Slip Resistance Performance & Luminance Contrast Testing Data pages 76 to 82.