

EXTRUDED DOOR SEALS AND BLACK CORNER GUARDS

DOOR SEALS - TYPE DC

Material/Thickness

- Soft resilient seal
- Standard length 4 metres
- Black colour



Uses/Applications

- As a buffer strip on the bottom or edge of doors

Installation

- On request available factory drilled (optional extra)
- Continuous loose steel flat bar for superior mounting (optional extra)

DC BUMPER

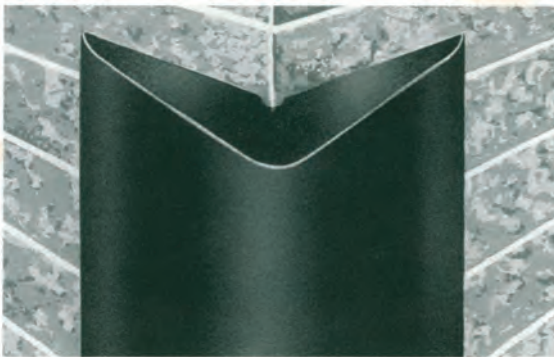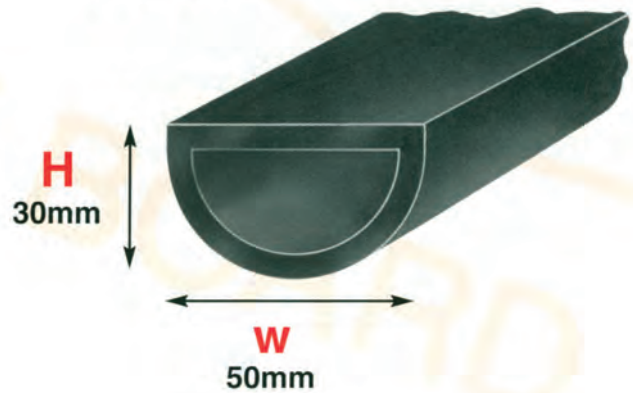

B88 - (65 x 65) x 900mm LONG
(EXTRA LENGTH CORNER GUARDS TO ORDER)

B88 RESILIENT CORNER GUARDS

- B88 Resilient Corner Guards
- (Grey colour available at extra cost)

Features

- Mounted vertically or horizontally along the corners of walls or beams to reduce damage
- Heavy-duty flexible compound controls damage to equipment and vehicles saving money

Benefits

- Easy installation
- Maintenance free
- Tough and long-lasting EPDM rubber

Material/Thickness

- 20mm thick at corner x 900mm long

Installation

- Titazel adhesive Thixotropic 2 part Resin with mechanical fasteners

Uses/Applications

- Wide range of uses in industrial and commercial applications to withstand abrasion and jolts
- Provide maximum protection in storage spaces, parking areas and loading docks

