



## Interior and Exterior Application

Latham Asbraloy Bevelled Edge Safety Stair Tread Nosings are designed for new applications where pedestrian safety, stair appearance and stair longevity is of particular concern.

The systems can be installed into new work and are designed for installation with carpet or vinyl applications.

All SB Series Bevelled Edge Safety Stair Tread Nosings are suitable for internal or external applications and are available with a wide range of insert colours (see pages 06 to 07).

### Lengths

All Asbraloy and Asbrabronz profiles are offered factory cut to the site required length (up to 4600mm in 1 continuous length) complete with countersunk holes, stainless steel or brass screws (depending on the selected section) and plastic plugs. If specified at time of order, treads can be supplied in full manufacturing lengths of 4600mm for on site cutting and drilling to suit clients supplied fixings.

All Asbraloy and Asbrabronz Safety Stair Tread Nosings are discreetly stamped on the surface close to one end as manufactured by "Latham Australia Sydney", which ensures installed material can be

identified in the future and is the clients confirmation that the specified product has been installed.

Factory Cutting Tolerance: +0/-3mm.

### Screw Fixing Holes

Unless otherwise specified at time of order, holes will be provided in the treads to suit 8 gauge stainless steel or brass screws (details under Accessories-Fixing page 04) at Latham's standard 250mm centres. Any special machining, mitering, modifications or alternative hole locations will be carried out at extra cost.

### Finishes

Asbraloy Aluminium profiles are supplied in mill finish. On request profiles can be supplied with a polished bullnose or in clear anodized finish at additional cost. In marine type applications Asbraloy profiles should be specified with 20 micron clear anodised finish.

GOOD  
DESIGN



LATHAM ASBRA  
SAFETY FLOORING  
PRODUCTS

Designed in Australia  
Licence No. 95205  
Good Design Australia


Slip Resistance Performance Testing for Asbraloy and Asbrabronz profiles can be found on pages 76 to 77 of this catalogue. All measurements in millimetres.

Customers with special applications or requirements are invited to discuss them with us. Call for detailed information before specifying and ordering. Service factors must be taken into consideration when selecting stair tread profile.

Product installation details pages 58 to 62.




## Interior and Exterior Application

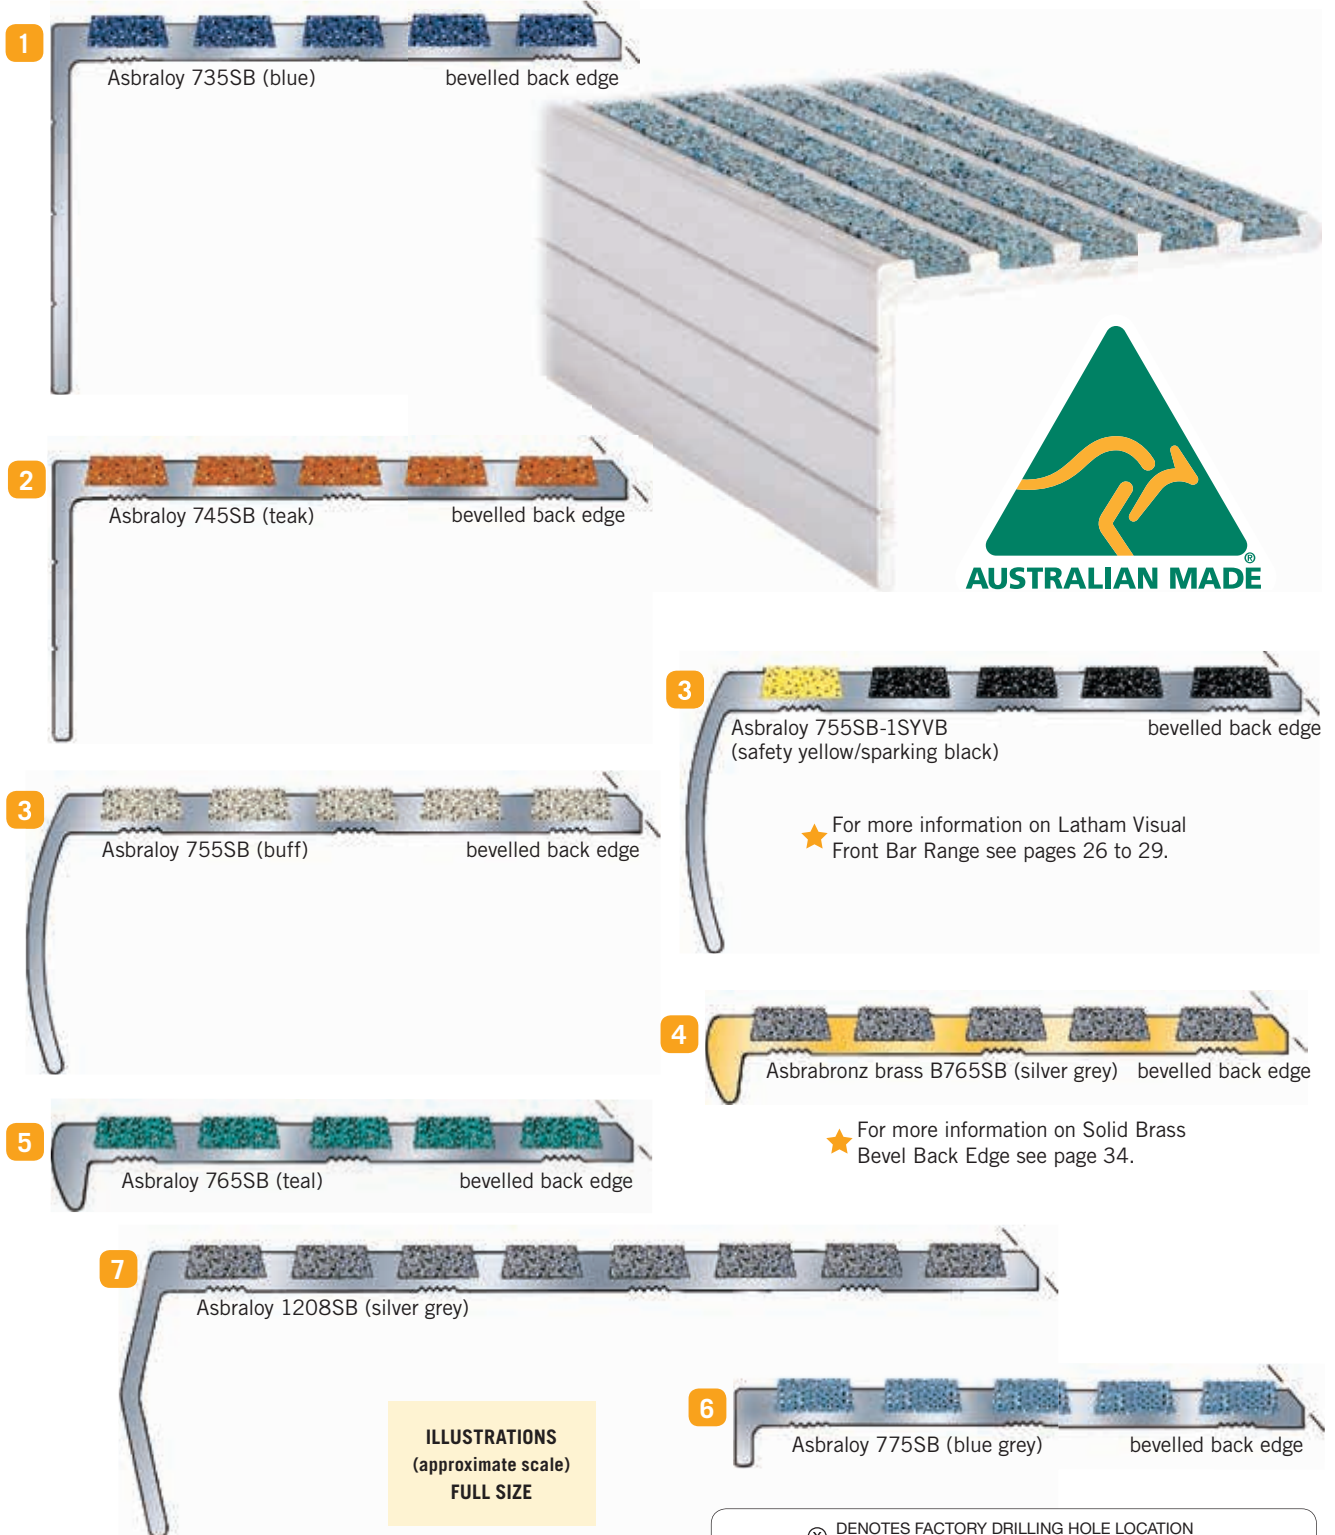

**ILLUSTRATIONS**  
(approximate scale)  
**FULL SIZE**

Index	Product No.	Metal Type	A	B	C	D	E	Drilling Location
1	735SB	Aluminium	72	50	5	75	3	4
2	745SB	Aluminium	73	37	5	75	3	4
3	755SB	Aluminium	75	37	5	80	3	4
4	B765SB	Brass	69	12	5	75	3	4
5	765SB	Aluminium	69	12	5	75	3	4
6	775SB	Aluminium	73	10	5	75	3	4
7	1208SB	Aluminium	115	37	5	115	3	3+7

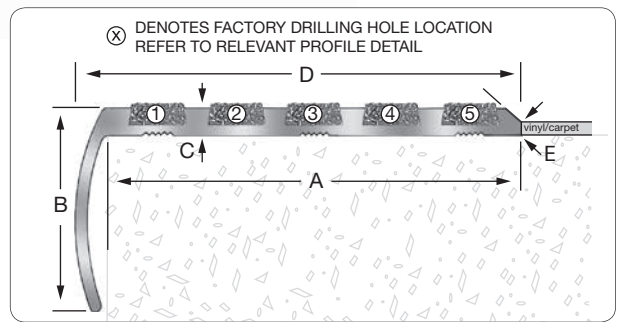

Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

Designs and specifications subject to change without notice.