

LATHAM ORIGINAL NEOPRENE-X-PANSION LOC® STRIPS

NXP LOC STRIPS




Standard Stock & Non-Stock Neoprene-X-Pansion Loc® Strips ■ Brass, Zinc, Stainless Steel

The tables on these pages indicate some of the available Loc® Strip configurations. Illustrations show some of the colour combinations available for neoprene inserts and metal side plates.


Latham Neoprene-X-Pansion Loc® Strips are designed to be used in all hard flooring applications and are designed to be installed in conjunction with wet bedded flooring applications. See page 5-7 for further details.

Latham Neoprene-X-Pansion Loc® Strips are supplied in standard lengths of 1800mm and installed so as to minimise the frequency of butt joints and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see Page 26). Latham Neoprene-X-Pansion Loc® Strips are designed specifically for use with optional GW50/SSW50 Wire Anchors for maximum control. Further information on specification pages 20-27.


Latham Neoprene-X-Pansion Loc® Strips should be installed at all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across doorways, garden beds, manhole covers and embedded pipe work and anywhere that may impede expansion and contraction of the tiling.

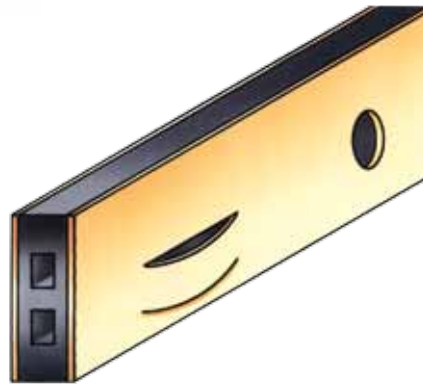


**LSB 22 x 6
brass/black**

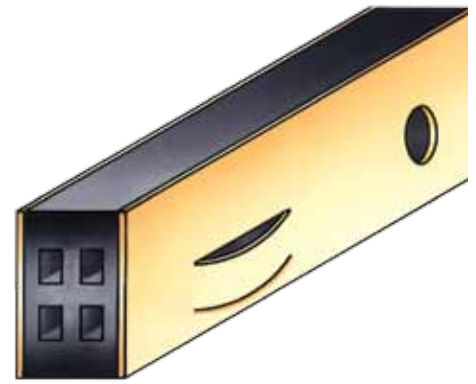


**LSB 22 x 12
brass/black**

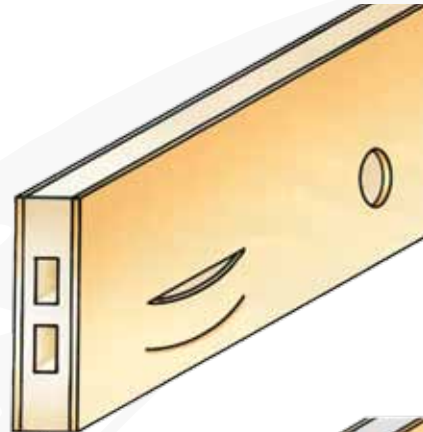

**LSB 31 x 6
brass/buff**

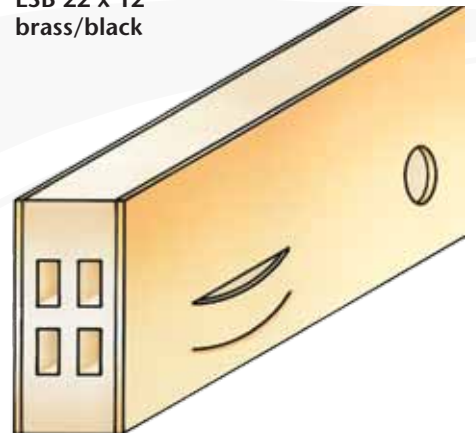

**LSB 31 x 12
brass/buff**

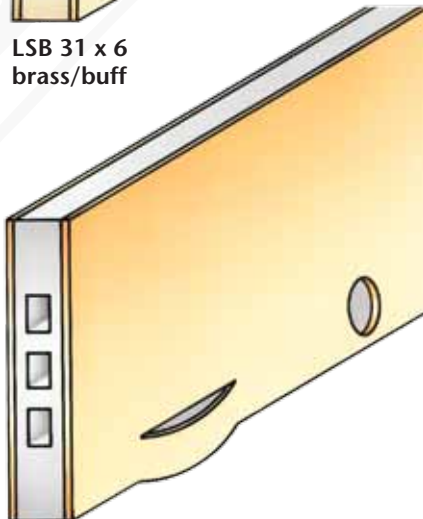

**Limited Control
Low Loop
LSBL 40 x 6
brass/grey**



**Limited Control
Low Loop
LSZL 40 x 12
zinc/black**

LATHAM AUSTRALIA PTY LTD
FAX: 61 2 9879 7666 PHONE: 61 2 9879 7888
EMAIL: JOINTS@LATHAM-AUSTRALIA.COM

LATHAM ORIGINAL NEOPRENE-X-PANSION LOC® STRIPS

NXP LOC STRIPS




LATHAM AUSTRALIA PTY LTD
FAX: 61 2 9879 7666 PHONE: 61 2 9879 7888
EMAIL: JOINTS@LATHAM-AUSTRALIA.COM


Optional 3mm Sideplates available all brass & zinc products



LSB3MM 31 x 12
brass/black

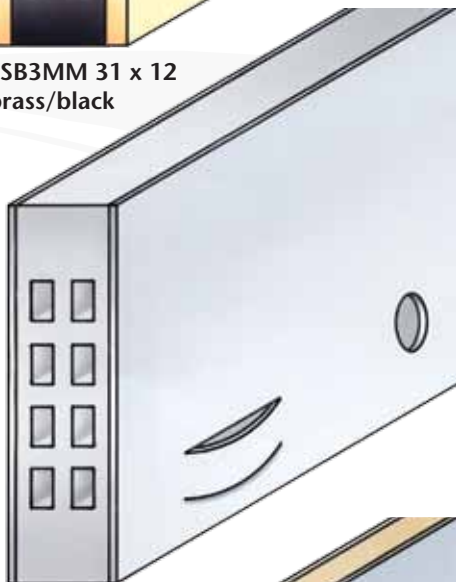

LSZ 50 x 12
zinc/grey

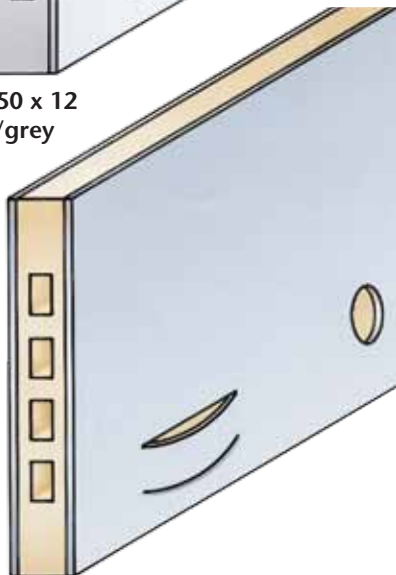

LSS 50 x 6
stainless steel/buff

6mm Wide Neoprene-X-Pansion Loc® Strips			
Specify Neoprene Colour & Wire Anchors			
Brass	Zinc	Stainless Steel	Accommodates Paving Maximum Thickness
LSB-22 x 6	LSZ-22 x 6	LSS-22 x 6	8mm
LSB-31 x 6	LSZ-31 x 6	LSS-31 x 6	15mm
LSBL-40 x 6	LSZL-40 x 6	LSSL-40 x 6	30mm
LSB-50 x 6	LSZ-50 x 6	LSS-50 x 6	35mm
LSBL-50 x 6	LSZL-50 x 6	LSSL-50 x 6	40mm
LSB-65 x 6	LSZ-65 x 6	LSS-65 x 6	50mm
LSB-80 x 6	LSZ-80 x 6	LSS-80 x 6	65mm
LSB-90 x 6	LSZ-90 x 6	LSS-90 x 6	75mm
LSB-100 x 6	LSZ-100 x 6	LSS-100 x 6	85mm
LSB-115 x 6	LSZ-115 x 6	LSS-115 x 6	100mm

Standard neoprene colour black. Grey & buff colours available on request.

All products are supplied in 1800mm lengths.

Neoprene-X-Pansion Loc® Strips are supplied with the following metal sideplate thicknesses: standard brass & zinc products 1mm thick; stainless steel type 304 0.7mm thick (note: stainless steel products are not recommended for finish to be ground in situ).

Optional 3mm thick brass & zinc sideplates are also available, specify with 3mm sideplates when ordering.
Brass: LSB3mm / Zinc: LSZ3mm



Strips for special applications
Contact Latham Technical Representative

12mm Wide Neoprene-X-Pansion Loc® Strips			
Specify Neoprene Colour & Wire Anchors			
Brass	Zinc	Stainless Steel	Accommodates Paving Maximum Thickness
LSB-22 x 12	LSZ-22 x 12	LSS-22 x 12	8mm
LSB-31 x 12	LSZ-31 x 12	LSS-31 x 12	15mm
LSBL-40 x 12	LSZL-40 x 12	LSSL-40 x 12	30mm
LSB-50 x 12	LSZ-50 x 12	LSS-50 x 12	35mm
LSBL-50 x 12	LSZL-50 x 12	LSSL-50 x 12	40mm
LSB-65 x 12	LSZ-65 x 12	LSS-65 x 12	50mm
LSB-80 x 12	LSZ-80 x 12	LSS-80 x 12	65mm
LSB-90 x 12	LSZ-90 x 12	LSS-90 x 12	75mm
LSB-100 x 12	LSZ-100 x 12	LSS-100 x 12	85mm
LSB-115 x 12	LSZ-115 x 12	LSS-115 x 12	100mm

Standard neoprene colour black. Grey & buff colours available on request.