
## SAA (FASM 38) Ultimate Series - SHallow Flexible Mechanical Expansion Joint Cover

LATHAM AUSTRALIA PTY LTD

14 TENNYSON ROAD GLADESVILLE 2111 AUSTRALIA Phone: 61 2 9879 7888 Fax: 61 2 9879 7666 Web: www.latham-australia.com



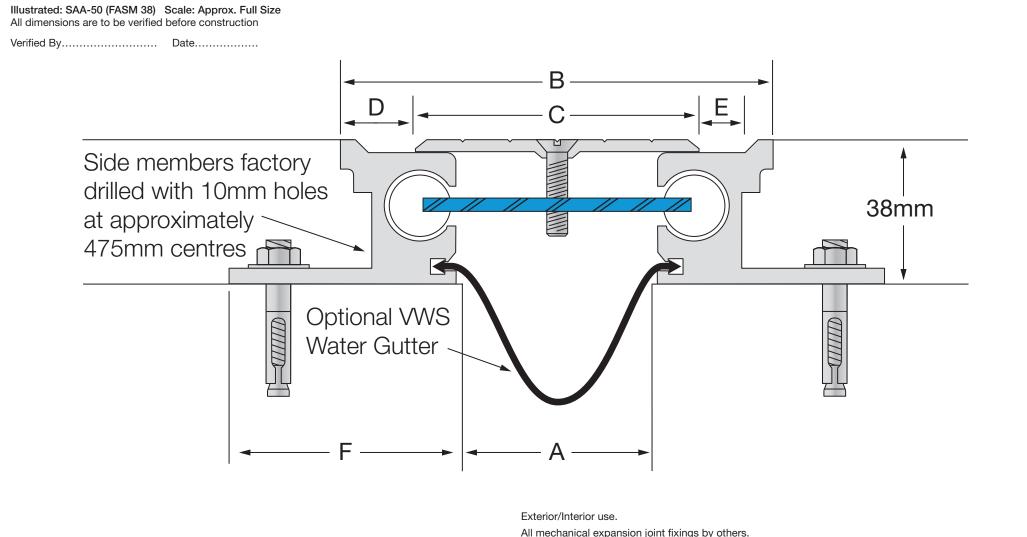

	minium Code ribbed deck	A	В	С	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SAA-	25 (FASM 38)	25	87	50	18	13	60	+20/-15mm	35mm	38mm	3mm
SAA-	50 (FASM 38)	50	113	75	18	13	60	+20/-25mm	45mm	38mm	3mm
SAA	-75 (FASM 38)	775	137	100	18	13	60	+20/-25mm	45mm	38mm	3mm
All dimensions are in millimetres.											

The centering bar consists of two full nylon spheres fastened at opposite ends of a flat spring steel bar. The bar is positioned diagonally across the joint opening with the spheres inside the extruded cylindrical tracks. This unique concept allows for increased rotational movements and maintains constant spring tension at the centre of the cover plate. This greatly reduces the stresses on the embedded anchor sections and the surrounding concrete slabs.

Design subject to change without notice.

COPYRIGHT © 2009 LATH3513