



Interior and Exterior Application

Economical and easy to install, Latham Safety Bars provide slip resistant protection for pedestrians, building occupants and owners.

Safety Stair Bars highlight the leading edge of the step, or make ramp or flat surfaces safe, and are filled with slip-resistant Suregrip silicon carbide mineral granules for heavy and light duty applications. They are available in both aluminium and solid brass.

These metal supported products are recommended for installation in rebated or preformed grooves in granite, marble, terrazzo, concrete and timber treads.

Standard colour is sparkling black with aluminium or brown with solid brass. Other colours are optional in any section. See pages 06 to 08 for full insert colour range.

Service factors must be taken into consideration when selecting stair tread profile.








Lengths

All Asbraloy and Asbrabronz profiles are offered factory cut to the site required length (up to 4600mm in 1 continuous length) complete with countersunk holes, stainless steel or brass screws (depending on the selected section) and plastic plugs. If specified at time of order treads can be supplied in full manufacturing lengths of 4600mm for on site cutting and drilling to suit clients supplied fixings.


Factory Cutting Tolerance: +0/-3mm.

Screw Fixing Holes

Unless otherwise specified at time of order, holes will be provided in the treads to suit 8 gauge stainless steel or brass screws (note details under Accessories-Fixing page 4) at Latham's standard 250mm centres. Any special machining, mitering, modifications or alternative hole locations, will be carried out at extra cost.

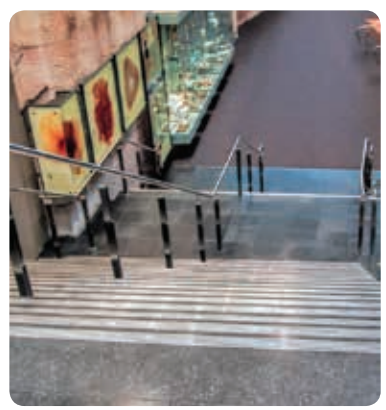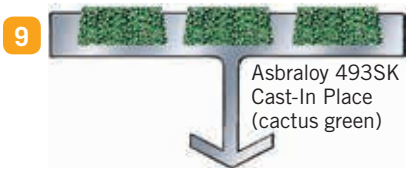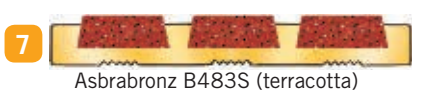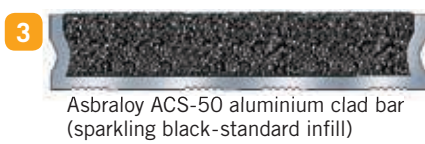

Index	Product No.	Metal Type	A	B	C	Drilling Location
1	ACS-20	Aluminium	20	10	-	1
2	BCS-20	Brass	20	10	-	1
3	ACS-50	Aluminium	50	10	-	1
4	ACS-50SK	Aluminium	50	10	15	-
5	322S	Aluminium	33	5	-	1+2
6	B322S	Brass	33	5	-	1+2
7	B483S	Brass	48	5	-	2
8	493S	Aluminium	50	5	-	2
9	493SK	Aluminium	50	5	15	-
10	B805S	Brass	75	5	-	3
11	1308S	Aluminium	117	5	-	2+7

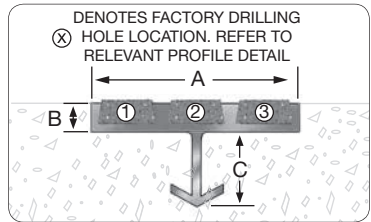

Slip Resistance Performance Testing for Asbraloy and Asbrabronz profiles can be found on pages 76 to 77 of this catalogue. All measurements in millimetres. Service factors must be taken into consideration when selecting stair tread profile.

Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

Designs and specifications subject to change without notice.