

Latham Carpet-Line Series Aluminium Expansion Joint Cover with Brass Cover Plate **DRCB**



Illustrated: DRCB-25

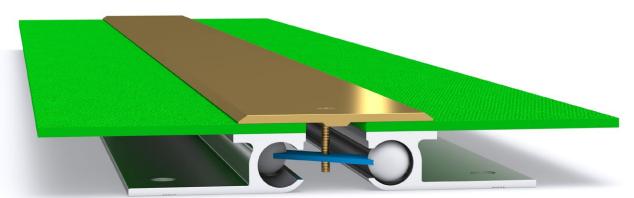

| Brass Code smooth deck | | в | с | D | Movement | Total Available Movement | Overall Depth | Cover Plate Thickness |
|---------------------------|-----|-----|-----|----|-----------|-----------------------------|---------------|--------------------------|
| DRCB-25 | 25 | 79 | 75 | 68 | +25/-15mm | 40mm | 23mm | 3mm |
| DRCB-50 | 50 | 104 | 100 | 68 | +/-25mm | 50mm | 23mm | 3mm |
| DRCB-75 | 75 | 129 | 125 | 68 | +/-25mm | 50mm | 23mm | 3mm |
| DRCB-100 | 100 | 154 | 150 | 68 | +/-25mm | 50mm | 23mm | 3mm |
| DRCB-150 | 150 | 194 | 200 | 68 | +/-25mm | 50mm | 23mm | 4mm |

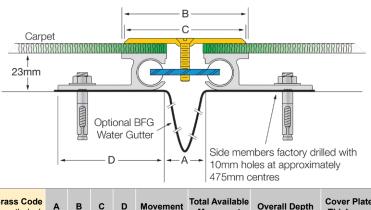



FEATURES

- Aluminium floor expansion joint cover with a brass cover plate.
- Suited to carpet flooring applications.
- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles.
- 23mm depth below carpet base.
 Installed in a preformed recess
- Installed in a preformed recess.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy cover plate.
- Supplied in 3050mm lengths (brass cover plates supplied in 4000mm lengths).
- Spring steel treated centering bar with nylon spherical







BFG water gutter





w <u>www.latham-australia.com</u> e sales@latham-australia.com p +612 9879 7888 balls (at ~475mm centres).

FIXINGS

 Side member pre-drilled at ~475mm centres for 10mm fasteners.

FURTHER TECHNICAL SPECIFICATIONS

- Website Link PDF and DWG Details
- <u>Product Information</u>
- Joint Specifications
- Fire Rated Systems
- Full Product Catalogue
- Architectural Specifications
- <u>Warranty</u>