Latham Carpet-Line Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate **DRCSL**

в

Wall member

factory drilled to accept

countersunk head 6.5mm fixings

Overall Depth


23mm

23mm

23mm

23mm

23mm

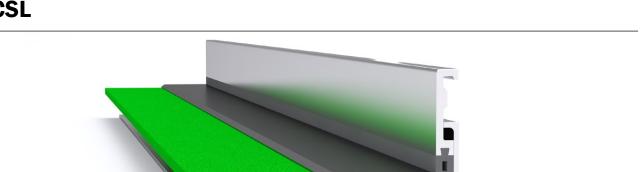

Illustrated: DRCSL-25





FEATURES

Stainless

Steel Code

smooth deck DRCSL-25

DRCSI -50

DRCSL-75

DRCSL-100 100

ABCD

25 52 50 68

50 77 75 68

75 102 100 68

DRCSL-150 150 177 175

• Aluminium floor-to-wall expansion joint cover with a stainless steel cover plate.

68

• Suited to carpet flooring applications.

127 125 68

Side members factory drilled with

10mm holes at

approximately

23mm

475mm centres

Carpet

TRANSPORTER

45mm

Optional BFG Water Gutter

Movement

+/-12mm

+/-12mm

+/-12mm

+/-12mm

+/-12mm

Total Available

Movement

25mm

25mm

25mm

25mm

25mm

- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles.
- 23mm depth below carpet base.
- Installed in a preformed recess.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

FIXINGS

Cover Plate

Thickness

3mm

3mm

3mm

3mm

4mm

- Side member pre-drilled at ~475mm centres for 10mm fasteners.
- Wall member pre-drilled at ~475mm centres to accept countersunk head 6.5mm fixings.

FURTHER TECHNICAL SPECIFICATIONS

- Website Link PDF and DWG Details
- Product Information
- Joint Specifications
- Fire Rated Systems
- <u>Full Product Catalogue</u>
- <u>Architectural Specifications</u>
 - <u>Warranty</u>











w <u>www.latham-australia.com</u> e sales@latham-australia.com p +612 9879 7888