

Interior and Exterior Application

All 12 VS-VB profiles have the new Latham 25mm Safety Visual Indicator Bar, which should contrast with the surrounding floor finish. The 744 and 994 Series can include the new bullnose indicator strip which is available with an 18mm sight line. The visual bullnose indicator can be replaced with a different indicator colour at any time.

Lengths

All Asbraloy and Asbrabronz profiles are offered factory cut to the site required length (up to 4600mm in 1 continuous length) complete with countersunk holes, stainless steel or brass screws (depending on the selected section) and plastic plugs. If specified at time of order, treads can be supplied in full manufacturing lengths of 4600mm for on site cutting and drilling to suit clients supplied fixings.

Factory Cutting Tolerance: +0/-3mm.

Screw Fixing Holes

Unless otherwise specified at time of order, holes will be provided in the treads to suit 8 gauge stainless steel or brass screws (note details under Accessories-Fixing page 04) at Latham's standard 250mm

18mm Visual Insert Riser Colour Range



Product installation details pages 58 to 62.

centres. Any special machining, mitering, modifications or alternative hole locations will be carried out at extra cost.

Finishes

Asbraloy Aluminium profiles are supplied in mill finish. On request profiles can be supplied with a polished bullnose or in clear anodized finish at additional cost.

In marine type applications, Asbraloy profiles should be specified with 20 micron clear anodised finish.

Asbrabronz Brass profiles are supplied in brush finish. On request profiles can be supplied with a polished bullnose.


Service factors must be taken into consideration when selecting stair tread profile.




Designs and specifications subject to change without notice.




Asbraloy 733VT (off white/teal) **1**

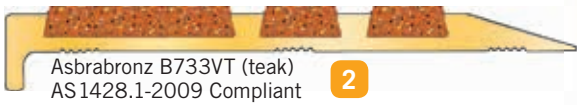


Asbrabronz B733VT (teak)
AS 1428.1-2009 Compliant **2**



Asbraloy 744VS (off white/blue grey) **3**



Asbrabronz B744VS (brown-standard infill) **4**

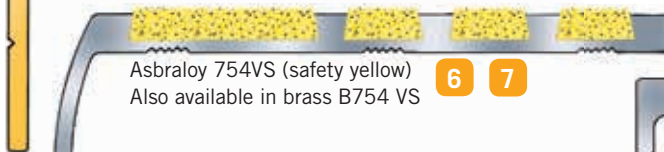

Asbraloy 754VS (safety yellow)
Also available in brass B754 VS **6 7**



Asbraloy 764VS (safety yellow/buff)
Also available in brass B764 VS **8 9**



Asbraloy 774VS (lumo/silver grey)
Also available in brass B774 VS **10 11**



Asbraloy 1004VT (lumo/teal)
Also available in brass B1004 VT **14 15**



Asbraloy 994VT (off white/blue) **12**




Asbraloy 1024 VT (safety yellow/teak) **16**



Asbraloy 994VT-VB18
(off white/blue grey) **13**



Slip Resistance Performance Testing for Asbraloy and Asbrabronz profiles can be found on pages 76 to 77 of this catalogue. All measurements in millimetres.

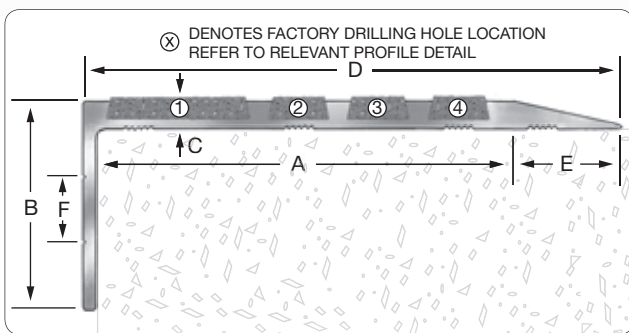

Index	Product No.	Metal Type	A	B	C	D	E	F	Drilling Location
1	733VT	Aluminium	58	10	5	75	15		3
2	B733VT	Brass	58	10	5	75	15	-	3
3	744VS	Aluminium	73	37	5	75	-	-	3
4	B744VS	Brass	73	37	5	75	-	-	3
5	744VS-VB18	Aluminium	73	37	5	75	-	18	3
6	754VS	Aluminium	75	37	5	80	-	-	3
7	B754VS	Brass	75	37	5	80	-	-	3
8	764VS	Aluminium	69	12	5	75	-	-	3
9	B764VS	Brass	69	12	5	75	-	-	3
10	774VS	Aluminium	72	10	5	75	-	-	3
11	B774VS	Brass	72	10	5	75	-	-	3
12	994VT	Aluminium	73	37	5	94	18	-	3
13	994VT-VB18	Aluminium	73	37	5	94	18	18	3
14	1004VT	Aluminium	75	37	5	98	18	-	3
15	B1004VT	Brass	75	37	5	98	18	-	3
16	1024VT	Aluminium	72	12	5	91	15	-	3

Measurements indicated are indicative only. If a precise recess is being cut use the material for a template or request a sample.

Designs and specifications subject to change without notice.