

# Latham Carpet-Line Series Aluminium Expansion Joint Cover with Brass Cover Plate

## **RCB**



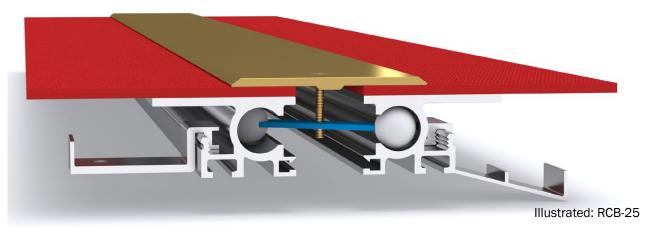

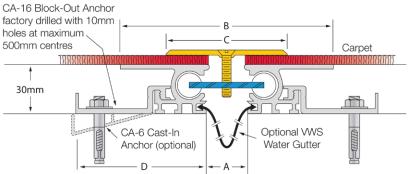

, .								
Brass Code smooth deck	A	В	С	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
RCB-25	25	133	75	82	+25/-15mm	40mm	30mm	3mm
RCB-50	50	158	100	82	+/-25mm	50mm	30mm	3mm
RCB-75	75	183	125	82	+/-25mm	50mm	30mm	3mm
RCB-100	100	208	150	82	+/-25mm	50mm	30mm	3mm
RCB-150	150	258	200	82	+/-25mm	50mm	30mm	4mm



### **FEATURES**

- Aluminium floor expansion joint cover with a brass
- Suited to carpet flooring applications.
- These joint covers should be used in conjunction with carpet and underlay, direct stick carpet or carpet tiles. FURTHER TECHNICAL SPECIFICATIONS
- 30mm depth below carpet base.
- Installed in a preformed recess or cast-in.

#### **MATERIALS**

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy cover plate.
- Aluminium supplied in 3050mm lengths, with 4000mm brass cover plates.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

### **FIXINGS**

- Supplied with clip-on CA-16 Block-Out Anchors (10mm holes pre-drilled) installed at ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied.

- Website Link PDF and DWG Details
- **Product Information**
- **Joint Specifications**
- Fire Rated Systems
- Full Product Catalogue
- **Architectural Specifications**
- **Warranty**









e sales@latham-australia.com

