



Latham Flat-Line Series Aluminium Expansion Joint Cover with Stainless Steel Cover Plate SD-50 to SD-150

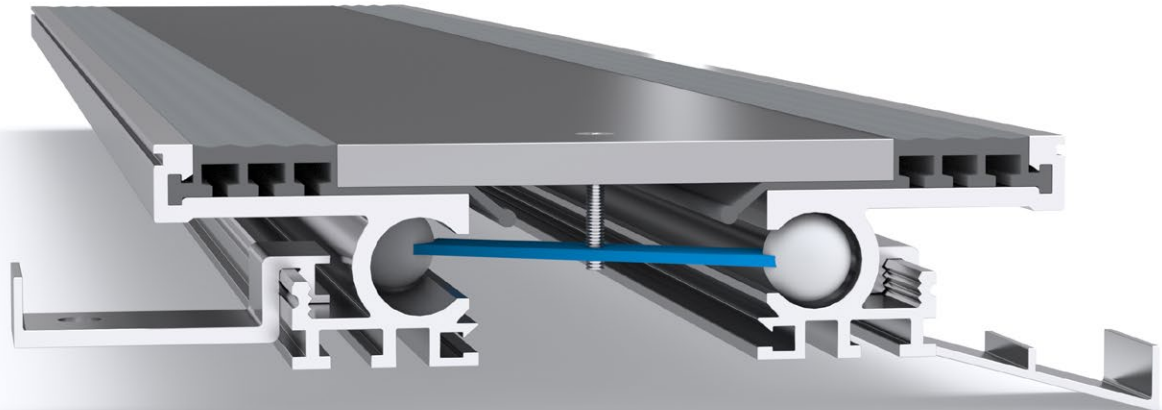

Illustrated: SD-50

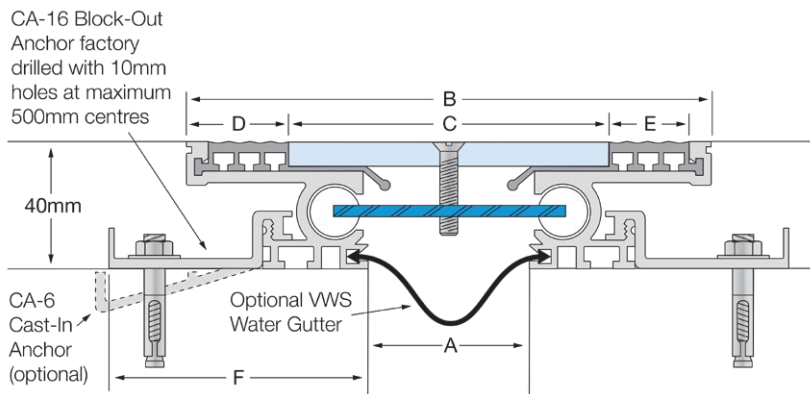

Stainless Steel Code	Coverplate Type	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
SD-50	Smooth	50	164	100	33	25	82	+/-8mm	16mm	40mm
SD-100	Smooth	100	214	150	33	25	82	+/-8mm	16mm	40mm
SD-150	Smooth	150	264	200	33	25	82	+/-8mm	16mm	40mm

FEATURES

- Aluminium floor expansion joint cover with a stainless steel cover plate.
- Pedestrian applications where even the slightest bump in a floor can not be tolerated.
- 40mm depth below floor finish.
- Installed in a preformed recess or cast-in.

MATERIALS

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade, 2B finish stainless steel cover plates.
- Extruded vinyl inserts.
- Supplied in 3050mm lengths.
- Spring steel treated centering bar with nylon spherical balls (at ~475mm centres).

FIXINGS

- Supplied with clip-on CA-16 Block-Out Anchors (10mm holes pre-drilled) installed at ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied for cast-in installations.

FURTHER TECHNICAL SPECIFICATIONS

- [Website Link - PDF and DWG Details](#)
- [Product Information](#)
- [Joint Specifications](#)
- [Fire Rated Systems](#)
- [Full Product Catalogue](#)
- [Architectural Specifications](#)
- [Warranty](#)



multi directional
6-way movement



indoor use



VWS water
gutter